

CS65AM

Outswing Door




- Lockable door sash, mulitple type of locks to choose.
- Once the bolt is engaged, it remains locked even when the handle returns to its resting position.
- Full set of HOPO hardware.
- Profile chamber is designed to form vertical isothermal line, enhancing energy efficiency and thermal insulation.
- Expansion corner keys with screw fastening and injected adhesive are adopted at the corners.
- Bottom sealing gasket is installed to eliminate sealing issues commonly found in low-threshold or zero-threshold door.

Product Configuration

Profile Thickness	1.6mm
Glass Configuration	5+20A+5mm
Sash Height Range	≤2600mm
Sash Width Range	≤1000mm
Hardware	HOPO

Screen Sash	-
Thermal Barrier	PA66GF25
Gasket	EPDM
Drainage	Visible Drainage

Selective Color




Grey



Brown

Opening Method

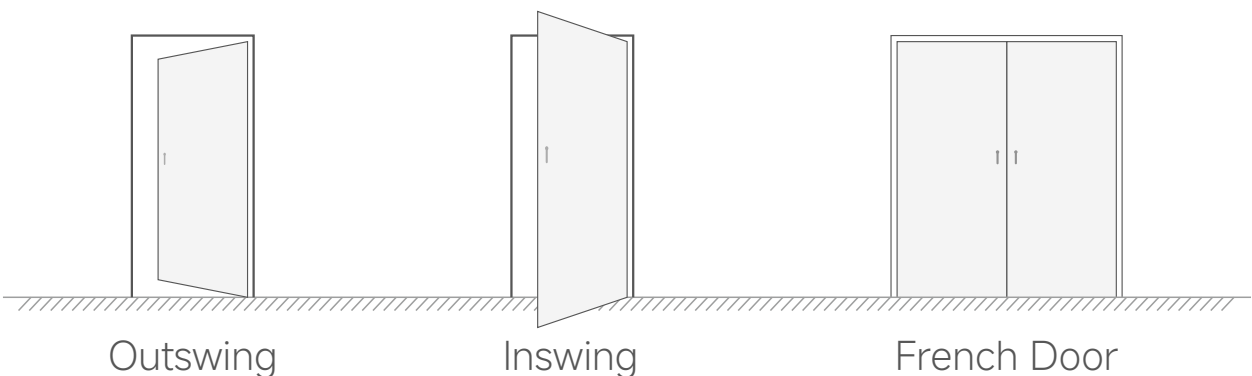

Safe System
Windows&Doors