


LS120A

Six-Track Sliding Window with Concealed Roller System

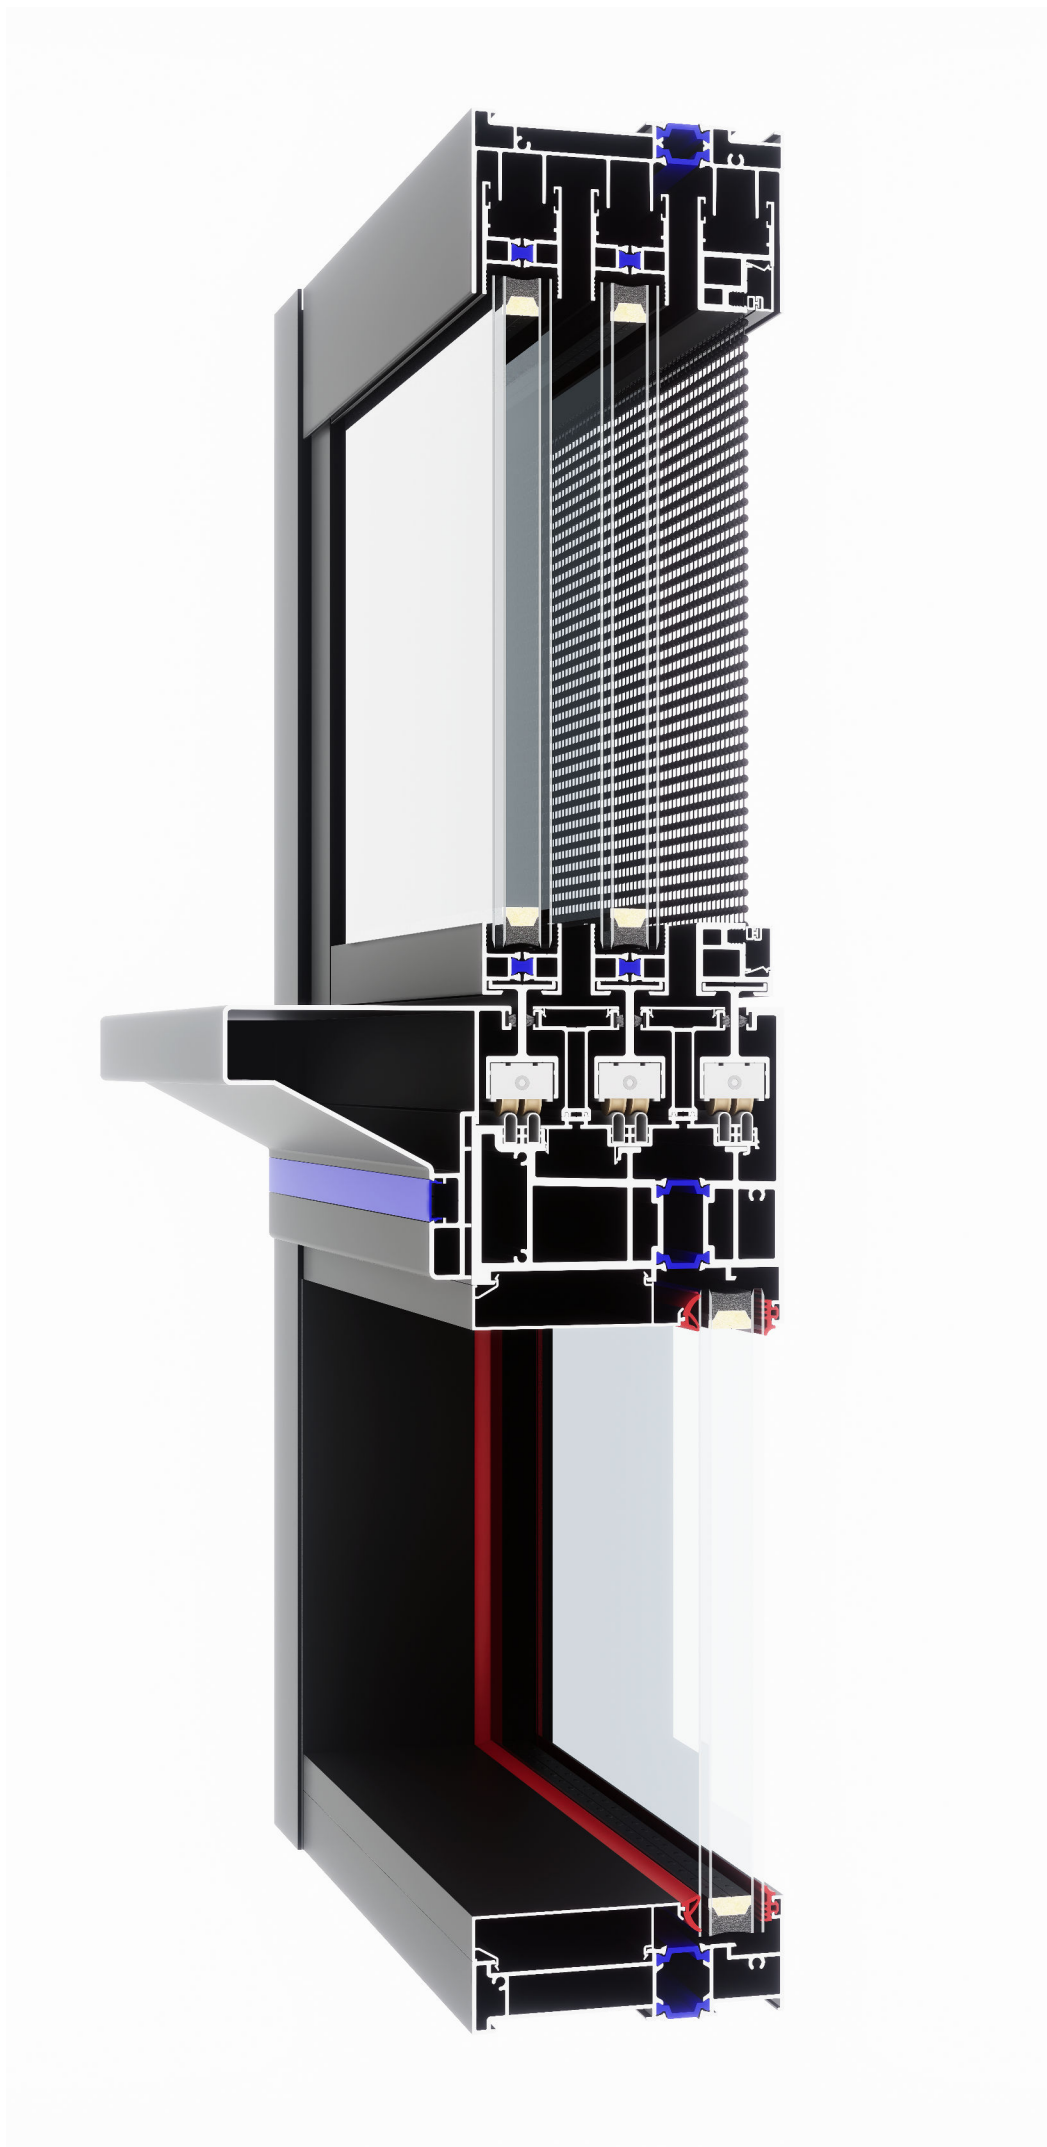

- 6063-T5 aluminium, profile thickness 3.5 mm.
- Concealed track.
- The frame-wrapped sash design minimizes visual obstruction and improves overall stability.
- Multiple floor drainage ensure more efficient water discharge
- 206mm wide window sill.
- Equipped with double-row bottom rollers.
- The interlock section features a three-layer gasket overlapping sealing.
- Available with both side-mounted and front-mounted automatic locks
- The screen sash can be installed both internally or externally
- The screen sash adopts a cast aluminum corner key with injected adhesibe bonding process.

Product Configuration

Profile Thickness	3.5mm
Glass Configuration	O 5+12A+5mm X 5+15A+5mm
Sash Height Range	420-2200mm
Sash Width Range	350-3000mm
Hardware	BOGO

Screen Sash	Apennine High-Transparency Mesh
Thermal Barrier	PA66GF25
Gasket	EPDM
Drainage	Visible Stepped Slop Drainage

Selective Color

Interior				Exterior	
Black	Grey	Brown	White	Grey	Brown

Opening method

2 Panel Sliding (OO)	3 Panel sliding (OOO)	Center Open Side Fixed (XOOX)