


LS162

Ultra-Slim Frame Heavy-Duty Sliding Door

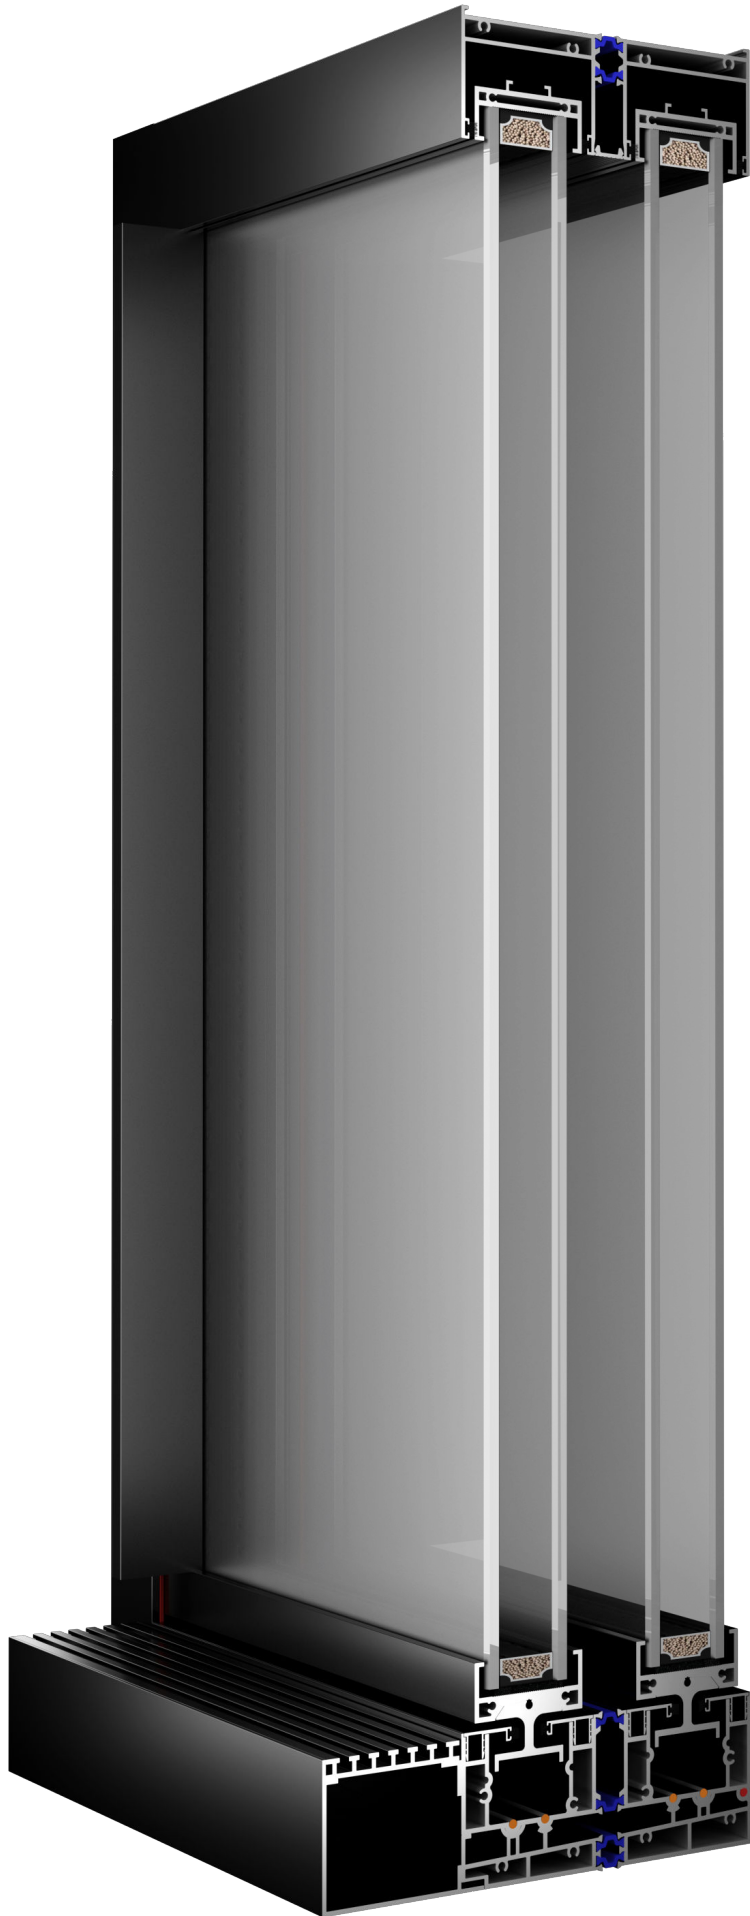


- 6063-T5 aluminium, profile thickness 4mm.
- Micro-gap bottom track for better drainage.
- Dual-row custom stainless steel rollers with a load capacity of up to 1500kg per panel.
- Optional smart motorized opening system supporting
- PIN code access and facial recognition.
- Automotive-grade sealing gaskets provide superior weathering sealing and improved sound insulation.
- Flexible configurations available, including center fixed with sliding panels on both sides or center sliding with fixed side panels.
- Interlock visible width of only 19mm, delivering a minimal design and maximizing the view
- Concealed frame and hidden track design allow up to 96% glass surface, creating exceptional natural lighting.


Product Configuration

Profile Thickness	4.0mm	Screen Sash	-
Glass Configuration	6+20A+6mm	Thermal Barrier	PA66GF25
Sash Height Range	800-3600mm	Gasket	EPDM
Sash Width Range	1100-4000mm	Drainage	Visible+built-in drainage
Hardware	BOGO		


Opening method

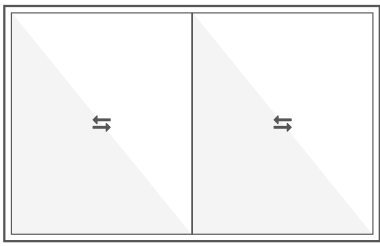

2 Panel Sliding
(OO)

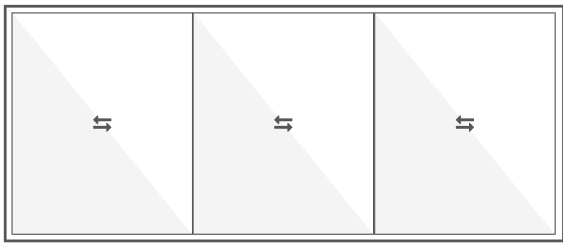

3 Panel Sliding
(OOO)

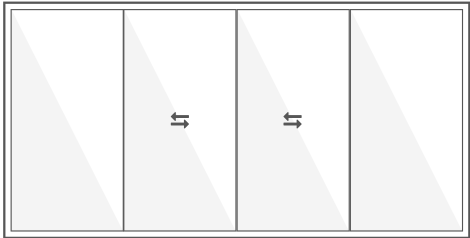

Center Open Side Fixed
(XOOX)




6 Panel Sliding
(OOOOOO)

Selective Color

Interior & Exterior



Black



Grey